

**GAUGES & INSTRUMENTATION**



**5 PSI & 10 PSI  
DIAPHRAGM GAUGE  
FOR GAS TEST**



W-R#	Description	PSI
1715500	2 1/2" Diaphragm	5 psi
1715502	2 1/2" Diaphragm	10 psi

- 1/4" NPT
- 1/10 Increments
- Accuracy: 1.5% of full scale range

*Please note: This gauge is extremely sensitive. Overpressurizing this gauge will cause the measuring element to fail and render the gauge inoperable. Wal-Rich will not accept returns of gauges that are improperly used.*



**GAS TEST MANIFOLD  
& AIR VALVE**

W-R#	Description	Min	Box
A000334	Manifold	1	-
1838102	1/8" Air Valve	12	12
1838100	Manifold & Valve	1	-



**STANDARD GAS TEST  
ASSEMBLY**

W-R#	Description	Increments
1838103	2" 15# gauge	1/2 lb.
1838104	2" 30# gauge	1/2 lb.
1838106	2" 60# gauge	1 lb.
1838108	2" 100# gauge	2 lb.

- 3/4" FIP brass-plated manifold
- Individually bagged
- 1/8" air valve included



**5 PSI & 10 PSI  
LOW-PRESSURE GAS  
TEST ASSEMBLY**

W-R#	Description	Min	Box
1838110	5 psi Low Pressure Test Kit		
1838112	10 psi Low Pressure Test Kit		

- Furnished as shown with hexagonal test block, 1/8" tank valve, & 1/8" Male X Female Air Cock.
- Uses 2 1/2" 1/4" NPT Diaphragm Gauge
- **Increments: 1/10 psi**
- Accuracy: 1.5% of full-scale range


The key to the **W-R Low Pressure Gas Test Kit** is the diaphragm actuated gauge. Standard Pressure gauges are not capable of measuring minute variations because they use a bourdon tube. This type of measuring element, which is effective for higher pressures, will not detect the minute variations in pressure when a leak exists.

Be advised **AIR COMPRESSORS** should not be used to get a reading, and that most **BICYCLE** and **HAND PUMPS** can deliver upwards of 60 psi. per thrust.

*Please note: This gauge is extremely sensitive. Overpressurizing this gauge will cause the measuring element to fail and render the gauge inoperable. Wal-Rich will not accept returns of gauges that are improperly used.*

**GAUGES & INSTRUMENTATION**

**5 PSI & 10 PSI  
GAS TEST KIT WITH RUBBER BULB**

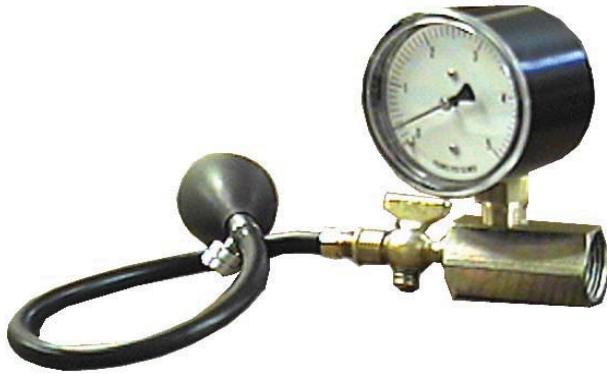


W-R#	Description
<b>GT-5</b>	5 PSI Kit
<b>GT-10</b>	10 PSI Kit
<b>1838200</b>	Bulb & Tubing Only

- Furnished as shown with hexagonal test block, 1/8" tank valve, & 1/8" Male X Female Air Cock.

- **Increments: 1/10 psi**
- Accuracy: 1.5% of full-scale range

*Please note: This gauge is extremely sensitive. Overpressurizing this gauge will cause the measuring element to fail and render the gauge inoperable. Wal-Rich will not accept returns of gauges that are improperly used.*

**5 PSI & 10 PSI  
GAS TEST KIT WITH DOUBLE-TAPPED  
MANIFOLD**

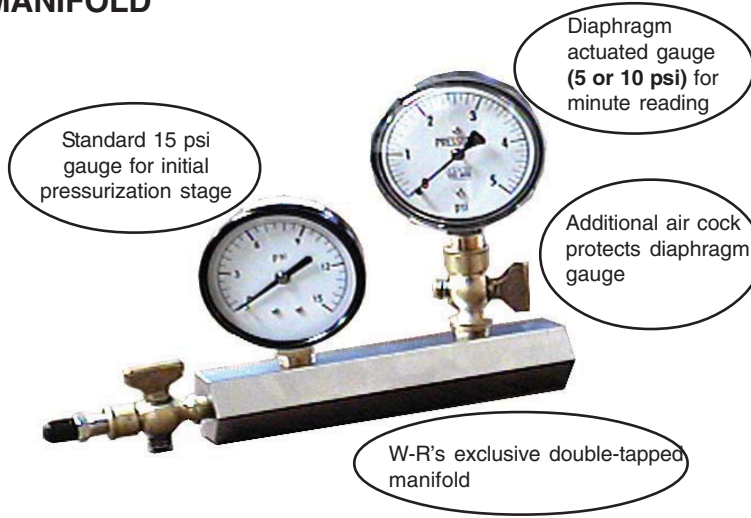

W-R#	Description
<b>BDGT-5</b>	5 PSI "NYC" Kit
<b>BDGT-10</b>	10 PSI "NYC" Kit

- Contains:**
- Steel Double-tapped hexagonal test block
  - 1/4" Male x Female Air Cock
  - 1/8" Male x Female Air Cock
  - 2 1/2" 15 psi Standard Pressure Gauge
  - **Uses 2 1/2" 1/4" NPT 5# or 10# Diaphragm Gauge**
- (Increments: 1/10 psi for minute readings)**
- Accuracy: 1.5% of full-scale range

*Please note: This gauge is extremely sensitive. Overpressurizing this gauge will cause the measuring element to fail and render the gauge inoperable. Wal-Rich will not accept returns of gauges that are improperly used.*



**PRESSURE SNUBBERS**

W-R#	Description	Box
<b>1726004</b>	Brass Snubber	6

- For regulation of sudden pressure changes



**PIGTAIL STEAM  
SYPHONS**

1/4"MNPT x 1/4"MNPT

W-R#	Description	Box
<b>1706002</b>	Straight (180°) - Steel	6
<b>1706006</b>	Straight (180°) - Brass	6
<b>1706004</b>	Angle (90°) - Steel	6
<b>1706008</b>	Angle (90°) - Brass	6