




Genuine **Sammy®** products have been the professional's choice for over 15 years. **Sammy®** screws save the contractor time and materials costs in pipe-hanging applications.

FOR WOOD




Straight Screws
For 3/8" All-thrd rod
Min. 1/4" Steel
Min 1-1/2" Wood

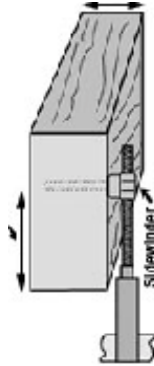

Sidewinders Screws
For 3/8" All-thrd rod
Designated by "SW"

FOR STEEL



TEK 50 Self-drills & Self-taps into steel up to 1/2" thick. SWDR & DST self-drills & self-taps through 3/16" steel and accepts retainer nut.

FOR CONCRETE



Use 20 ft/lbs torque on nut. For CST use 1/4" bit & drill 2" deep in concrete.



"SAMMY" SCREWS® FOR WOOD

Fits 3/8" threaded rod

W-R#	Pattern	Length	Sammy#	Box
2440001	Straight	1"	GST-10	25
2440002	Straight	2"	GST-20	25
2440003	Sidewinder	1"	SWG-10	25
2440004	Sidewinder	2 1/2"	SWG-25-380	25



"SAMMY" SCREWS® FOR STEEL

Fits 3/8" threaded rod

W-R#	Pattern	Length	Sammy#	Box
2440006	Straight	1"	DST-10	25
2440010	Straight	1 1/2"	TEK-50	25
2440008	Sidewinder	1 1/4"	SWDR516	25



"SAMMY" SCREWS® FOR CONCRETE

Fits 3/8" threaded rod

W-R#	Pattern	Length	Sammy#	Box
2440012	Straight	1 1/2"	CST-20	25
2440014	Sidewinder	1 1/2"	SWC-20	25



"SAMMY" SCREWS® - SETTING TOOL -


W-R#	Sammy#
2440102	Sammy Driver 8113910
2440104	Sidewinder Driver 8114910

ALL "SAMMY" SCREWS ARE FOR 3/8" THREADED ROD



Tapcon® screws are the original masonry anchor that cuts threads into concrete, masonry, or hollow block. Tapcon® screws are reversible and removable.

ORIGINAL TAPCON® CONCRETE ANCHORS

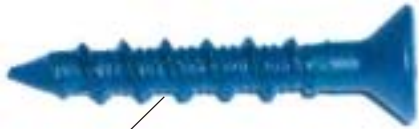

HiLo® Thread pattern


W-R#	Size	Box
1333302	1/4" x 1 1/4"	100
1333304	1/4" x 1 3/4"	100
1333306	1/4" x 2 3/4"	100

- Phillips head drive
- Blue Climaseal® coating
- Original HiLo® threading

TAPCON® WOOD-TO-METAL SCREWS



"Wings"

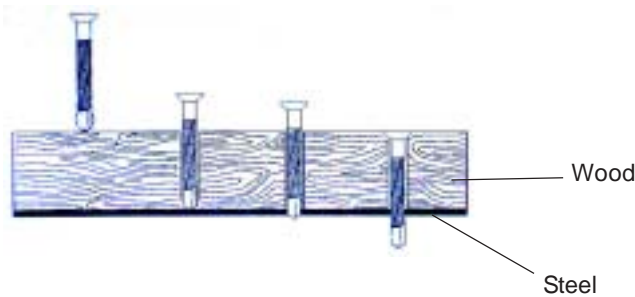

W-R#	Size	Box
1333302	1/4" x 1 1/4"	100

- Phillips head drive
- Gray Spex® coating
- "Wings" ream a hole in wood, preventing thread engagement during drilling.
- For attaching 1/4" - 3/4" wood to steel